

# Pre-Insulated Tubing

## IMPERIAL SIZES

Series 2200

DEKORON<sup>®</sup>  
**Unitherm**<sup>™</sup>  
 Tubing Bundle Experts Since 1962

Dekoron<sup>®</sup> Unitherm<sup>™</sup> Series 2200 Pre-Insulated Tubing is a thermally insulated fluid transport line suitable for steam, gas, or liquid transport.

Each line is comprised of the following elements:

- Single process tube
- Moisture resistant, non-wicking, inorganic fibrous glass thermal insulation
- Choice of weather protective jacket

The energy-efficient design provides for nominal jacket surface temperatures of 140°F or lower at 80°F ambient conditions while transporting 400°F saturated steam.

Higher temperature designs for applications up to 1100°F are available in product series 2210.



### Additional features of this product are:

- Compact design
- low heat loss
- Light, durable, easy to handle
- Zero maintenance
- Employee protection
- Continuous lengths up to 1000 feet
- Easy to Install
- Cost savings up to 50% over field fabrication

### Applications for this product:

- Steam supply lines
- Condensate return lines
- Gas transport lines
- Liquid transport lines

### Stock Items in this Series:

- 2200-21A30
- 2200-20A35
- 2200-31A32
- 2200-30A35
- 2200-41A35
- 2200-40A35
- 2200-41A39
- 2200-47A35

For assistance ordering this product, please contact your Dekoron<sup>®</sup> Unitherm<sup>™</sup> representative.

### Standard Outer Jacket Materials

- 105°C Rated Flame-Retardant PVC
- 125°C Rated Flame-Retardant TPE
- Halogen-Free Flame-Retardant TPU

### Standard Tubing Materials

- Welded or Seamless type 316/316L stainless steel
- #122DHP Seamless Copper
- PFA Fluoropolymer

### Pre-Insulated Tubing Accessories:

#### Seal-Tite End Boots

Singe Tube  
Dual Tubes

#### Item Number

BOOT-2  
BOOT-3

Uniseal Cable Entry Seals  
for Bundles up to 1.375"  
for Bundles up to 2.62"

Seal 1.60  
Seal 2.75

Unicut<sup>™</sup> Bundle Jacket Cutter

1631-01001

RTV Silicone End Sealant

3 oz. tube  
10.3 oz. cartridge

1535-02080  
1535-02120

Seal Patch Kits

8" x 8" Single Self-Sealing Patch  
8" x 25 foot Self-Sealing Roll

1540-10000  
1540-20000

DEKORON<sup>®</sup>  
**Unitherm**<sup>™</sup>  
 Tubing Bundle Experts Since 1962

1531 Commerce Creek Boulevard • Cape Coral, Florida 33909  
 Call Toll Free (800) 633-5015 • Telephone (239) 995-8111 • Fax (239) 995-8027  
[www.unithermcc.com](http://www.unithermcc.com)

# Pre-Insulated Tubing

## IMPERIAL SIZES

Series 2200



### Product Specifications 2200 Pre-Insulated Tubing

Tube OD	Standard Wall Thickness <sup>(1)</sup>	Material <sup>(2)</sup>	ASTM Std	Working Pressure @ 400°F <sup>(3)</sup>	Nominal Heat Loss @ 400°F	Nominal Bundle OD	Nom. Weight lb/ft	Min Bend Rad
1/4"	0.032"	#122DHP Copper	B-68, B-75	710 PSI	50 BTU/Hr-Ft	1.00"	0.3	6"
3/8"	0.032"	#122DHP Copper	B-68, B-75	450 PSI	50 BTU/Hr-Ft	1.15"	0.4	7"
1/2"	0.035"	#122DHP Copper	B-68, B-75	360 PSI	59 BTU/Hr-Ft	1.25"	0.4	8"
1/2"	0.049"	#122DHP Copper	B-68, B-75	530 PSI	59 BTU/Hr-Ft	1.25"	0.5	8"
3/4"	0.049"	#122DHP Copper	B-68, B-75	340 PSI	79 BTU/Hr-Ft	1.50"	0.7	9"
1/4"	0.035"	316/316L- S/S WLD	A-269	4125 PSI	42 BTU/Hr-Ft	1.00"	0.3	6"
3/8"	0.035"	316/316L- S/S WLD	A-269	2625 PSI	50 BTU/Hr-Ft	1.15"	0.4	7"
1/2"	0.035"	316/316L- S/S WLD	A-269	1925 PSI	59 BTU/Hr-Ft	1.25"	0.4	8"
1/2"	0.049"	316/316L- S/S WLD	A-269	2775 PSI	59 BTU/Hr-Ft	1.25"	0.5	8"
1/4"	0.040"	PFA Fluoropolymer	D-6867	30 PSI	42 BTU/Hr-Ft	1.00"	0.2	6"
3/8"	0.062"	PFA Fluoropolymer	D-6867	40 PSI	50 BTU/Hr-Ft	1.15"	0.3	7"
1/2"	0.062"	PFA Fluoropolymer	D-6867	30 PSI	59 BTU/Hr-Ft	1.25"	0.3	8"

**Notes:**

- (1) other wall thickness are available
- (2) alternate metal and polymer tubing materials are available
- (3) working pressure based on welded tube, seamless will be higher.

Contact Dekoron Unitherm for alternate materials

**Notes:**

Standard outer jacket is a 105°C Rated flame retardant PVC, alternate jackets are a 125°C Rated, flame retardant Thermoplastic polyolefin (TPE) and a flexible, halogen-free flame retardant Thermoplastic urethane (TPU)


Contact Dekoron Unitherm for alternate materials

### How to use this graph:

1. Find the minimum ambient temperature for the area where the bundle is installed.
2. Draw a line vertically to the line closest to the normal steam pressure used.
3. Read the Heat Loss from the left side of the graph.
4. Multiply the Heat Loss shown on the graph by the multiplier below for the size tubing used.

### Heat Loss Multipliers:

1/4"	3/8"	1/2"	3/4"
1.0	1.3	1.5	1.9

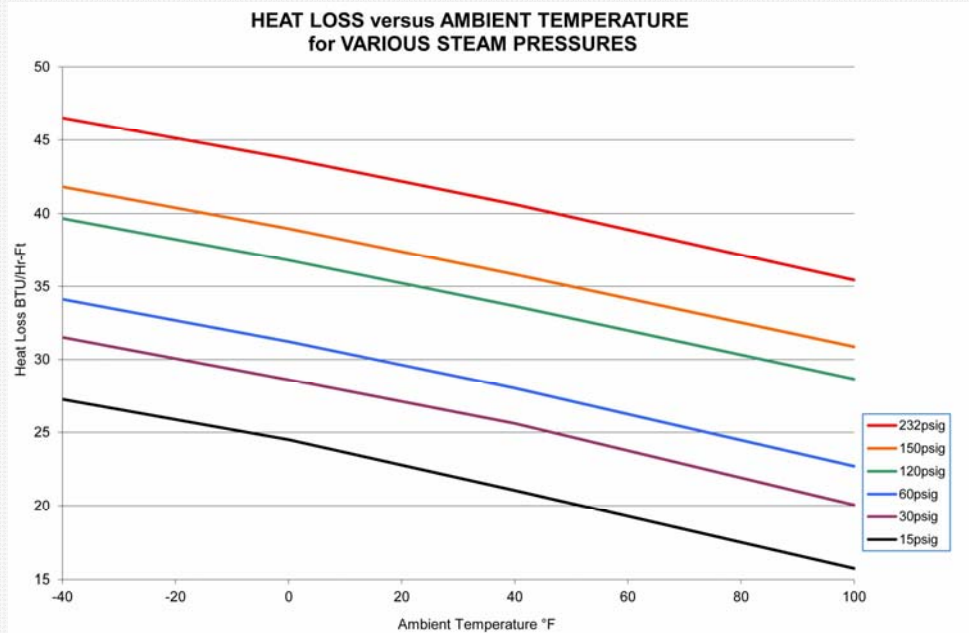

1531 Commerce Creek Blvd  
 Cape Coral, FL 33909 USA  
 Toll Free: 800.633.5015  
 Phone: 239.995.8111  
 Fax: 239.995.8027

For additional information visit our website:  
[www.unithermcc.com](http://www.unithermcc.com)

### Installation Note:

Dekoron® Unitherm™ Pre-insulated tubing bundles are supplied on sturdy wooden reels with continuous splice-free lengths up to 1000 feet depending upon tubing material, tubing OD and wall thickness. It is easily pulled into place and installed using normal hand tools. 2200 Pre-Insulated tubing is flexible and can be easily formed into place by hand or by using a bending mandrel. For heavy wall tubing, Dekoron Unitherm recommends using a **BNDL-BNDR** bending tool. Contact Dekoron Unitherm for details.

This document contains empirical and theoretical information provided in good faith by Dekoron Unitherm LLC and does not constitute a warranty or supersede the Standard Warranty as stated in the Terms and Conditions of Sale. All values represent typical performance for the condition given. Variations in local conditions and materials may alter the product performance. It is the sole responsibility of the customer to determine if this product is suitable for their application. This information is proprietary to Dekoron Unitherm and is furnished on the express condition that the information contained herein will not be used for second source procurement, or directly or indirectly in any way detrimental to the interests of Dekoron Unitherm LLC.